



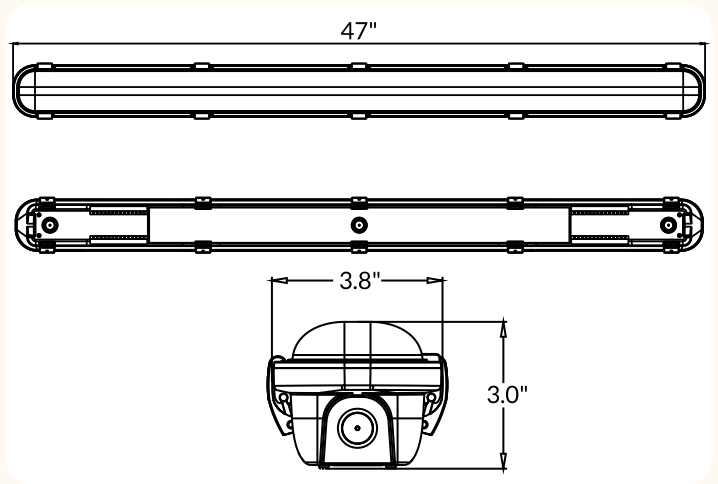

# NITELITE-50

Photoperiod Safe Utility Light

✂ Craft to commercial, we grow better plants.

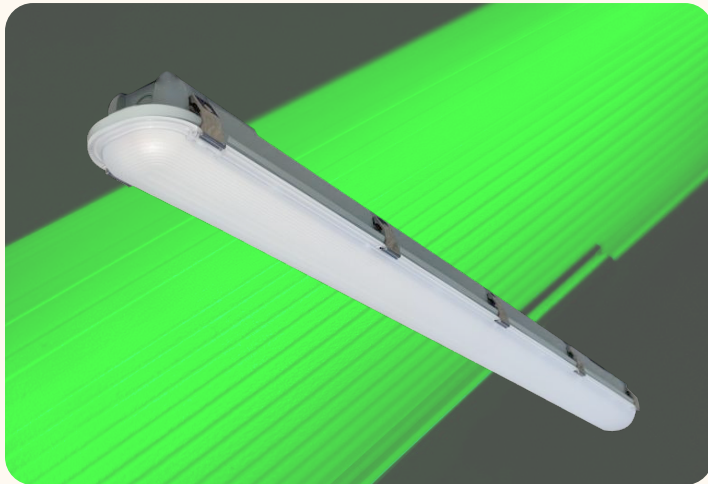

## FEATURES

The NITELITE-50 is a utility light designed to meet the unique needs of those growing photoperiodic cultivars. Using high quality and photoperiod safe 530 nm green LEDs means you can get work done without disrupting your plants precious beauty sleep.

## SPECIFICATIONS

Dimensions (L x W x H)	47 x 3.8 x 3.0 in
Weight	4.6 lbs
Input Voltage	120-277 Vac, 50/60 Hz
Input Power	34-50 W Field Selectable
Power Factor / THD	> 90% / < 20%
Operating Temperature	-20 - 50°C (-4 - 122°F)
Controls	0-10V

## KEY FEATURES

**34-50**  
WATTS

**4600**  
LUMENS

**IP65**  
PROTECTION

**530**  
NM PEAK WAVELENGTH

**5 Year**  
WARRANTY

Light Source	Cree LED XP-E2
Output Flux	up to 4600 lm
Spectrum	Photoperiod Safe 530 nm
Lifetime (Q70/Q90)	100K / 46K hrs
Recommended Mounting Height	> 36 in

## ORDER

SERIES	WATTAGE	SPECTRUM	INPUT
CTNL	50	525	ST
CABATech NitelLite	50W Max, Field Selectable	Photoperiod safe 525nm Green	120-277Vac

SPECCTNL20231220

CABATech - 2622 N Woodruff Rd, Spokane Valley, WA 99206  
800-853-7606 - info@cabatech.com - cabatech.com

