
CABA HILANON NOT OF

**ONE4ONE-BR40** 

**Efficiency Optimized** 

#### imes Craft to commercial, we grow better plants





### **KEY FEATURES**



The original 1:1 HPS replacement for greenhouse and indoor growers. Combining patented spectral technology in a lightweight and compact form factor like no other, the ONE4ONE sets a new standard in efficient top lighting. Experience the difference from install to harvest.

Proudly Designed and Manufactured in Spokane, WA


# **SPECIFICATIONS**

Dimensions (L $\times$ W $\times$ H)	19.67" x 10.25" x 5.5"
Weight	13.5 lbs
Input Power	614 W
Input Voltage Range	120-277 Vac, 50/60 Hz
Power Factor / THD	> 90% / < 20%
Spectrum	BR40
Output Flux	1633 umol/s
Output Efficiency	2.7 umol/J
Lifetime Q70 / Q90	76000 hrs / 50000 hrs
Operating Temperature	-40 to 40 °C / -40 to 104 °F
Rec. Minimum Mounting	> 36 in
Certifications	UL, DLC
Warranty	5 years, 90% output

#### **ORDERING TABLE**

Series	Power Class	Spectrum	Input Range
CT141	640	BR40	ST
CABA TECH ONE4ONE	Series Wattage	Broad Application CEA Spectrum	120-277 Vac

# ONE4ONE-BR40 SPECTRUM INFORMATION

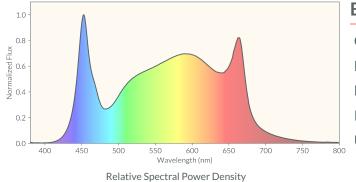

#### **BR40 Spectrum**

Output	1633 umol/s
Efficacy	2.7 umol/J
Blue:Red Ratio	0.45
Red:Far Red Ratio	17.3
UV Content	0%

### **DIMMING INTERFACE**

Fixture Dimming Interface	Fixture Mounted RJ12 Socket
Supported Protocols	0-10V, PWM, Resistive
Compatible Cables	Straight Wired RJ12 or RJ11
Dimming Range	Dim-to-Off
Tunable Spectrum	2CH Tunable Spectrum

Pin	Function
1	N/A
2	CH1+
3	CH1-
4	CH2 +
5	CH2 -
6	N/A

# **DLC PRODUCT INFORMATION**

DLC Product Category	Horticultural Lighting Fixture
Controlled Environment	Indoor (Stacked), Greenhouse
Lighting Scheme (Position)	Top Light
Lighting Scheme (Usecase)	Sole-Source, Supplemental

# **CORD OPTIONS**

Comes standard with a 10ft IP68 cable, equipped with a NEMA 6-15P plug. Adapter included for NEMA 5-15P. For additional customization, please contact us.

#### CT141640BR40ST250206

#### ONE4ONE-BR40 SHOWCASE



Spokane Valley, WA